


1000x2000mm



## INVISIBLE SLIDING DOOR

MODEL: T912



- ▶ Concealed rail sliding door system
- ▶ Soft close for 60mm
- ▶ 80KG loading capacity, not easy to deform
- ▶ Anti fall off sliding door system
- ▶ Removable damper positioning
- ▶ 3D adjustment for up and down, distance to wall and door level
- ▶ Elegant design, smooth and silent
- ▶ Easy installation

1000x2000mm



## FOLD-SLIDE SYSTEM

All doors can be fully opened and moving

MODEL: T902

- Single door loading capacity: ≤20 kg
- Single door width: 300-600mm
- Door thickness: ≥16mm
- Damper with Anti jumping and Anti-decoupling function; Auto reset function, easy adjustment; Imported POM material for wheel, to achieve best silent performance and long lifespan;



1000x2000mm



## CONCEALED SLIDING DOOR SYSTEM

MODEL: T312

- Loading capacity: 50kg
- Door thickness: ≥16mm
- Door width: 500-1200mm
- Door height: ≤2500mm
- Apply to MDF, plywood & solid wood furniture; Damper auto position, easy installation; Comfortable and safe function, improve furniture level and service life



1000x2000mm



## EXTERNAL SLIDING DOOR SYSTEM

MODEL: T409

- Loading capacity: 50kg
- Door thickness: ≤20mm
- Door width: 500-1200mm
- Door height: ≤2500mm
- External installation, no cutting or grooving needed
- Concealed damper with re-set function
- Damper with Anti jump and Anti-decoupling function



1000x2000mm



## EXTERNAL SLIDING DOOR SYSTEM

MODEL: T406

- Loading capacity: 60kg
- Door thickness: T406-20 Wooden doors ≤20mm
- T406-20 Alum frame door ≤34mm
- T406-25 Wooden doors ≤25mm
- Door width: 500-1200mm
- Door height: ≤2500mm
- External installation, no cutting or grooving needed; Damper with Anti jump and Anti-decoupling function; Imported POM material for wheel, to achieve best silent performance and long lifespan



1000x2000mm



## CONCEALED SLIDING DOOR SYSTEM

MODEL: T309

- Door thickness: ≤20mm
- Door width: 500-1200mm
- Door height: ≤2500mm
- Imported POM material for runner, to achieve silent performance and long lifespan.
- Concealed damper
- Up runner and down runner are same. Easy installation





1000x2000mm

  
FINEZZA

## CONCEALED DOOR ALIGNMENT

MODEL: T205

- Good looking:  
Concealed installation makes elegant appearance;
- Big adjustment:  
Easy regulation with  $\pm 6\text{mm}$
- Strong force:  
High strength steel makes strong and steady movement;
- Universal use:  
1000mm rod can be cut randomly
- Apply to door thickness  $\geq 15\text{mm}$ ;  
Door height: 1000mm~2700mm



1000x2000mm

  
FINEZZA

## HANGING SLIDING DOOR SYSTEM

MODEL: T602

Door thickness: 16~46mm; Door heights  $\leq 2500\text{mm}$   
20kg  $\leq$  Single door weight  $\leq 80\text{kg}$ , 700mm  $\leq$  Single door width  $\leq 1500\text{mm}$   
Clip on damper, dampers and parts are integrated. Easy installation  
Special design of down runner, easy to install and uninstall.

- Zinc alloy connector at both ends,  
Improve overall strength without bursting
- Plastic strips cover the whole straightened  
Better mute effect



1000x2000mm

  
FINEZZA


## FOLD-SLIDE HANGING ROLLER SYSTEM

MODEL: T909B

- Door thickness: 18-25mm
- Loading capacity: 2-door foldings  $\leq 25\text{kg}$  per door
- Door width:  
2-door folding width  $\leq 500\text{mm}$ , height  $\leq 2400\text{mm}$ , thickness: 18-25mm  
Excellent space after folding: distance between doors  $\leq 115\text{mm}$ ,  
folded angle  $< 15^\circ$ .
- Clip on with adjustment mechanism, easy installation.  
Only 30mm reserve space for median division board inside cabinet.  
Minimum gap 2mm after door closing.




1000x2000mm

  
FINEZZA

## DREAM BOX GLASS SIDE DRAWER WITH 4D ADJUSTMENT

MODEL: S50

The S50 Dream Box Glass Side Drawer With 4D Adjustment offers an elegant and durable design with 1.8mm tempered glass. Its patented clip-on feature allows for easy installation and side panel changeability. Enjoy 4D adjustment, a strong 35kg loading capacity, and a synchronized undermount slide for smooth and invisible operation. The decorative cover adds an elegant touch, concealing screw holes for a neat appearance.





MODEL: H88

Two-way Clip on Soft Closing Hinge




Good Locking

Smooth & Durable

Easy Installation

Big Adjustment

Flexible Matching



H97

STRAIGHT PLATE CLIP-ON SOFT CLOSING HINGE




Elegant Design

Soft, Gentle, Silent


One-Step Installation

Eccentric Adjustment

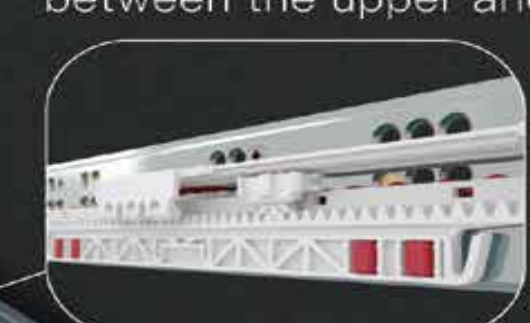
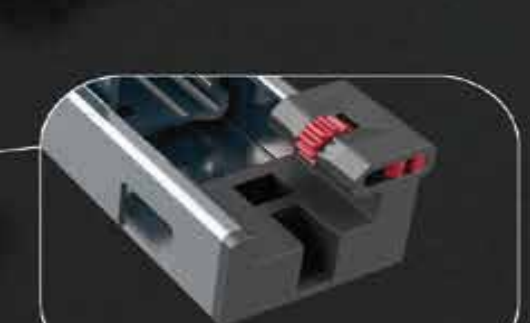


MODEL: S32

3D ADJUSTMENT SYNCHRONIZED SOFT CLOSING UNDERMOUNTED SLIDE



Unique teeth connection design, leading to a smooth and stable running between the upper and lower rails

Edge of slides are sealed by rubber, hand protection when installs and extends slides

3D adjustment:  
A for depth 0~+5mm;  
B for height 0~+3mm;  
C for width ±1.5mm

Locking device are simple, good-looking and easy to install

REBOUND BUFFER

Item No.: H3002



Rubber type

Magnet type

MODEL S-450

full extension push-open ball bearing slide

Q235B, Brinell hardness 120-130,  
Material thickness: 1.2/1.2/1.5, strong loading capacity



Maximum distance of push open is 2.5mm

Ball bearing's hardness is more than 50

Unique hoot construction, even open the drawer in wrong way, can easily return to push-open because of reset devise

MODEL: S90

Slim Double Wall Drawer



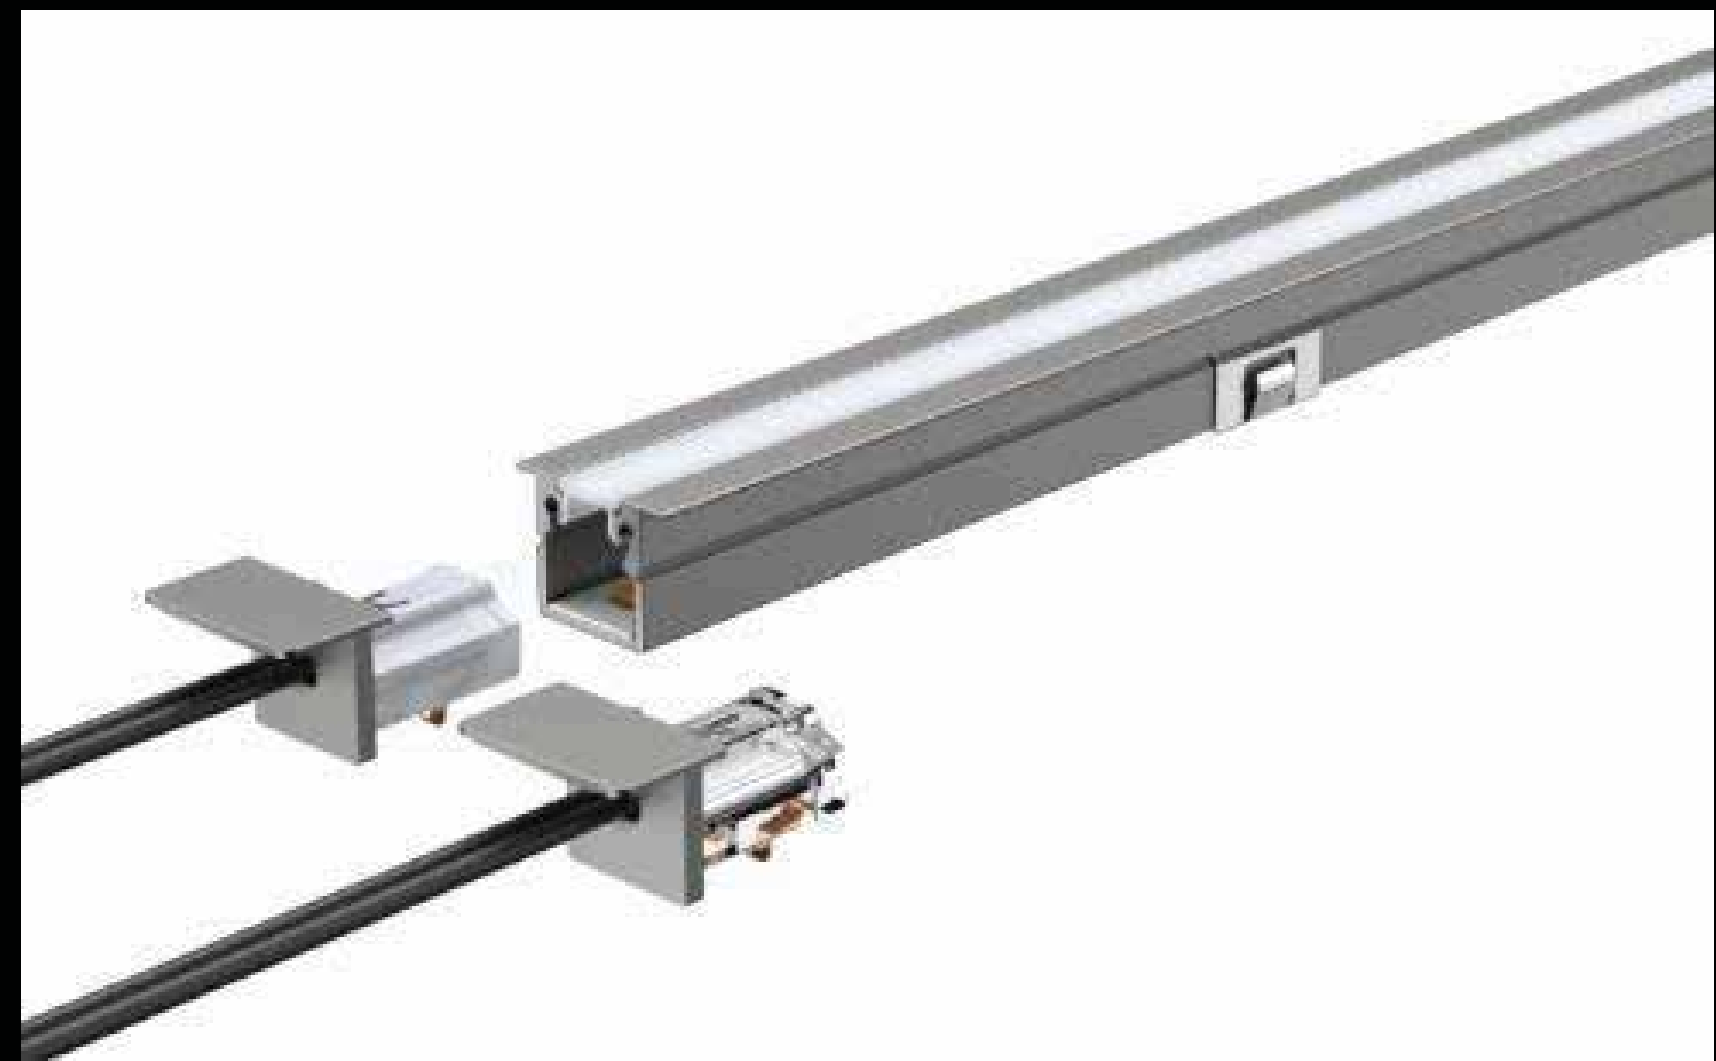




LED Strip



Alu. Profile With LED



LED Strip COB



Hanger Light

