Acessories for unique designs

Riyadh - Jeddah - Dammam - Madina - Mecca
Tabuk - Khamis Msheit - Buraida

+966 506392222

HINGE / SLIDE / DOUBLE WALL DRAWER • SERIES


FINEZZA
Acessories for unique designs



HINGE/ DOUBLE WALL DRAWER • SERIES

Acessories for unique designs

FINEZZA
Acessories for unique designs

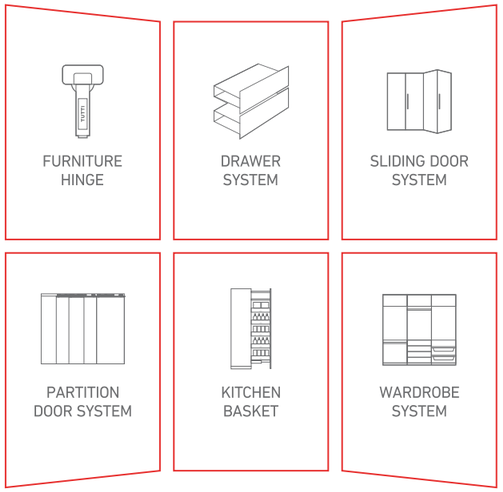

Acessories for unique designs

FINEZZA
Acessories for unique designs

Hinge series



Soft closing hinge series 003 - 012

Special hinge series 012 - 016

Slide on hinge series 017 - 018

Mounting plate series 019 - 022

Rebound buffer 023 - 026

Double Wall Drawer



Dream box 029 - 038

Slim double wall drawer 029 - 050

Undermounted Slide



Full extension undermounted slides 055 - 058


Partial extension undermounted slides 059 - 062

Ball Bearing Slide



Full extension soft closing slides 063 - 064

Full extension push-open slides 065 - 066



SOFT CLOSING HINGE




105°
0°



H88


TWO WAY CLIP ON SMALL ANGLE SOFT CLOSING HINGE

- Opening degree: 100°
- Diameter of hinge cup: Φ35mm
- Height of hinge cup: 12mm
- Cup hole distance: 45mm/48mm/52mm
- Dimension of door: 3~7mm
- Range for door thickness: 15~28mm

A FULL OVERLAY

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H105PAH	H105PBN






H=14+K-D

D / H	K 3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

B HALF OVERLAY

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H105PBH	H105PBN






H=5+K-D

D / H	K 3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

C INSET DOOR

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H105PCH	H105PCN






H=A+K-4

A / H	K 3	4	5	6	7
0	1	0	-1	-2	-3
2	3	2	1	0	-1
4	5	4	3	2	1

OPENING CLEARANCE VALUE


A / T	15	16	17	18	19	20	21	22	23	24	25	26	27	28
3	0.2	0.2	0.3	0.5	0.8	1.0	1.2	1.4	1.6	1.8	2.2	3.1	4.0	4.9
4	0.2	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.6	3.5	4.3
5	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.1	2.3	3.0	3.8
6	0.2	0.4	0.6	0.8	0.9	1.1	1.3	1.5	1.6	1.7	1.8	1.9	2.5	3.3
7	0.2	0.4	0.6	0.8	0.9	1.1	1.3	1.4	1.5	1.6	1.5	1.7	2.1	2.9

H = Height of mounting plate
D = Required cover distance on side panel
K = Distance from edge of door to the edge of the cup





L / T	15	16	17	18	19	20	21	22	23	24	25	26	27	28
3	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0	0.2	0.5	0	0.2	0.5
5	0	0	0.2	0.4	0.6	0.7	0.9	1.0	1.2	1.3	1.5	1.2	1.3	1.5
6	0.9	1.0	1.2	1.4	1.6	1.7	1.9	2.0	2.2	2.3	2.5	2.2	2.3	2.5
7	1.8	1.9	2.1	2.4	2.5	2.6	2.8	2.9	3.1	3.2	3.4	3.1	3.2	3.4


T = Door thickness
L = Gap between door and side panel
A = Distance from inside edge of door to the outside edge of side panel



CUP DRILLING







PRODUCT ACCESSORIES


Hinge cup decorative cover


Hinge arm decorative cover


Mounting plate for clip on soft closing hinge
H60H0C


Mounting plate for clip on soft closing hinge
H46H0F


Mounting plate for clip on soft closing hinge
H46H0

TYPES OF SCREWS AVAILABLE



D08 dowel
Dowel No. **D**



D10 dowel
Dowel No. **G**



F08 dowel
Dowel No. **N**




Euro screw
Screw No. **A**



P10 dowel
Screw No. **P**



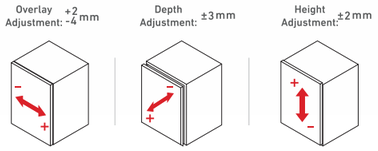

PRODUCT ACCESSORIES


Hinge cup decorative cover


Hinge arm decorative cover


Mounting plate for clip on soft closing hinge
H60H0C


Mounting plate for clip on soft closing hinge
H46H0f


Mounting plate for clip on soft closing hinge
H46H0

TYPES OF SCREWS AVAILABLE



D08 dowel
Dowel No. **D**



M10 dowel
Dowel No. **M10**



F08 dowel
Dowel No. **N**



M8 dowel
Dowel No. **M**



P10 dowel
Dowel No. **P**



F8 dowel
Dowel No. **F**


H49
CLIP ON SOFT CLOSING HINGE

- Opening degree: PD: 105°/ PE: 105°/ PF: 100°
- Diameter of hinge cup: Φ35mm
- Height of hinge cup: 12mm
- Cup hole distance: 45mm/48mm/52mm
- Dimension of door: 3~7mm
- Range for door thickness: PD: 16~22mm / PE: 16~22mm / PF: 15~28mm

30°

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H105PDH	H105PDN






H \ K	4	5	6	7
0	37 / 1.6	36 / 2.3	35 / 3.4	34 / 4.3
2	37 / -0.4	36 / 0.3	35 / 1.4	34 / 2.3
4	37 / -2.4	36 / -1.7	35 / -0.6	34 / 0.3

X / D

45°

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H105PEH	H105PEN






H \ K	4	5	6	7
0	37 / 1.0	36 / 1.7	35 / 2.5	34 / 3.3
2	37 / -1.0	36 / -0.3	35 / 0.5	34 / 1.3
4	37 / -2.0	36 / -2.3	35 / -2.5	34 / -0.7

X / D

90°

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H105PFH	H105PFN






H \ K	4	5
0	20 / 30	19 / 3.0
2	20 / 1.0	19 / 1.0
4	20 / -1.0	19 / -1.0

X / D

OPENING CLEARANCE VALUE


A \ T / K	16	17	18	19	20	21	22	23	24	25	26
3	1.7	2.1	2.5	2.9	3.4	4.1	4.8	5.5	6.3	7.2	7.7
4	1.7	2.0	2.4	2.8	3.3	3.8	4.4	5.0	5.7	6.9	7.3
5	1.7	2.0	2.4	2.8	3.3	3.8	4.4	4.9	5.6	6.2	6.8
6	1.4	1.7	2.0	2.4	2.9	3.3	3.9	4.4	4.9	5.8	6.4
7	1.2	1.5	1.8	2.2	2.6	3.0	3.5	3.9	4.4	5.5	6.1

H = Height of mounting plate
D = Required cover distance on side panel
K = Distance from edge of door to the edge of the cup





A \ T / K	16	17	18	19	20	21	22	23	24	25	26
3	0	0	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0.1	0.3	0.4	0.6	0.8	1.0
6	0.3	0.4	0.6	0.7	0.9	1.1	1.3	1.4	1.6	1.8	2.0
7	1.2	1.4	1.6	1.7	1.9	2.1	2.3	2.4	2.6	2.8	3.0


T = Door thickness
L = Gap between door and side panel
A = Distance from inside edge of door to the outside edge of side panel



CUP DRILLING










Overlay Adjustment: +2 -4 mm
Depth Adjustment: +4 -2 mm
Height Adjustment: ±2 mm

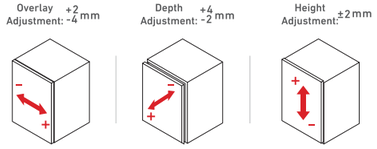

PRODUCT ACCESSORIES



Hinge cup decorative cover

TYPES OF SCREWS AVAILABLE



D08 dowel
Dowel No. **D**



D10 dowel
Dowel No. **G**



F08 dowel
Dowel No. **N**



Euro screw
Screw No. **A**




P10 dowel
Screw No. **P**

H97
STRAIGHT PLATE TWO WAY CLIP ON SMALL ANGLE SOFT CLOSING HINGE

- Opening degree: 100°
- Diameter of hinge cup: Φ35mm
- Height of hinge cup: 12mm
- Cup hole distance: 45mm/48mm/52mm
- Dimension of door: 3~7mm
- Range for door thickness: 15~28mm

A FULL OVERLAY		
	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H106PAH	H106PAN






H=14+K-D

D \ K / H	3	4	5	6	7
0	17	18	19	20	21

B HALF OVERLAY		
	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H106PBH	H106PBN






H=5+K-D

D \ K / H	3	4	5	6	7
0	8	9	10	11	12

C INSET DOOR		
	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H106PCH	H106PCN






H=A+K-4

A \ K / H	3	4	5	6	7
0	1	0	-1	-2	-3

OPENING CLEARANCE VALUE


A \ K / T	15	16	17	18	19	20	21	22	23	24	25	26	27	28
3	0.2	0.2	0.3	0.5	0.8	1.0	1.2	1.4	1.6	1.8	2.2	3.1	4.0	4.9
4	0.2	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.6	3.5	4.3
5	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0	2.1	2.3	3.0	3.8
6	0.2	0.4	0.6	0.8	0.9	1.1	1.3	1.5	1.6	1.7	1.8	1.9	2.5	3.3
7	0.2	0.4	0.6	0.8	0.9	1.1	1.3	1.4	1.5	1.6	1.5	1.7	2.1	2.9

H = Height of mounting plate
D = Required cover distance on side panel
K = Distance from edge of door to the edge of the cup





L \ K / T	15	16	17	18	19	20	21	22	23	24	25	26	27	28
3	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0	0.2	0.5	0	0.2	0.5
5	0	0	0.2	0.4	0.6	0.7	0.9	1.0	1.2	1.3	1.5	1.2	1.3	1.5
6	0.9	1.0	1.2	1.4	1.6	1.7	1.9	2.0	2.2	2.3	2.5	2.2	2.3	2.5
7	1.8	1.9	2.1	2.4	2.5	2.6	2.8	2.9	3.1	3.2	3.4	3.1	3.2	3.4


T = Door thickness
L = Gap between door and side panel
A = Distance from inside edge of door to the outside edge of side panel



CUP DRILLING










H96P
TWO WAY CLIP ON SOFT CLOSING HINGE

- Opening degree: 155°
- Diameter of hinge cup: Φ35mm
- Height of hinge cup: 11.5m
- Cup hole distance: 45mm/48mm/52mm
- Dimension of door: 3~7mm
- Range for door thickness: 16~24mm

A FULL OVERLAY

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H96PAH	H96PAN






H=14+K-D

D \ K / H	3	4	5	6	7
0	17	18	19	20	21
2	15	16	17	18	19
4	13	14	15	16	17

B HALF OVERLAY

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H96PBH	H96PBN






H=5+K-D

D \ K / H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

C INSET DOOR

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H96PCH	H96PCN






H=A+K-3

A \ K / H	3	4	5	6	7
0	0	-1	-2	-3	-4
2	2	1	0	-1	-2
4	4	3	2	1	0

OPENING CLEARANCE VALUE


A \ T / K	16	17	18	19	20	21	22	23	24
3	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0

H = Height of mounting plate
D = Required cover distance on side panel
K = Distance from edge of door to the edge of the cup




L \ T / K	16	17	18	19	20	21	22	23	24
3	0	0	0	0	0	0	0	0	0
4	0	0	0	0	0	0	0	0	0
5	0	0	0	0	0	0	0	0	0
6	0	0	0	0	0	0	0	0	0
7	0	0	0	0	0	0	0	0	0

T = Door thickness
L = Gap between door and side panel
A = Distance from inside edge of door to the outside edge of side panel



CUP DRILLING

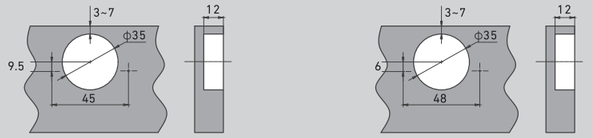

PRODUCT ACCESSORIES



Hinge cup decorative cover



Straight plate
D88H1



Mounting plate for clip on soft closing hinge
H60H0C



Mounting plate for clip on soft closing hinge
H46H0F



Mounting plate for clip on soft closing hinge
H46H0

TYPES OF SCREWS AVAILABLE



D08 dowel
Dowel No. **D**



D10 dowel
Dowel No. **G**



F08 dowel
Dowel No. **N**



P10 dowel
Screw No. **P**




H49P
SPECIAL ANGLE SOFT CLOSING HINGE

- Opening degree: 105°
- Diameter of hinge cup: Φ35mm
- Height of hinge cup: 11.3mm
- Dimension of door: 3~7mm
- Range for door thickness: 14~22mm

30°

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H49PAH	H49PAN






H \ K	4	5	6	7
0	37 / 2.5	36 / 3.4	35 / 4.3	34 / 5.2
2	37 / 0.5	36 / 1.4	35 / 2.3	34 / 3.2
4	37 / -1.5	36 / -0.6	35 / 0.3	34 / 1.2
	X			D

45°

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H49PBH	H49PBN






H \ K	4	5	6	7
0	37 / 4.5	36 / 5.4	35 / 6.3	34 / 7.2
2	37 / 2.5	36 / 3.4	35 / 4.3	34 / 5.2
4	37 / 0.5	36 / 1.6	35 / 2.3	34 / 3.2
	X			D

90°

	SOFT CLOSE HINGE	NON-SOFT CLOSE HINGE
Item No.	H49PCH	H49PCN





H \ K	4	5
0	20 / 2.8	19 / 2.8
2	20 / 0.8	19 / 0.8
4	20 / -1.2	19 / -1.2
	X	D

PRODUCT ACCESSORIES



Hinge cup decorative cover



Hinge arm decorative cover



Mounting plate for clip on soft closing hinge
H60H0C



Mounting plate for clip on soft closing hinge
H46H0F



Mounting plate for clip on soft closing hinge
H46H0

TYPES OF SCREWS AVAILABLE



D08 dowel
Dowel No. **D**



D10 dowel
Dowel No. **G**





F08 dowel
Dowel No. **N**




P10 dowel
Screw No. **P**


CUP DRILLING









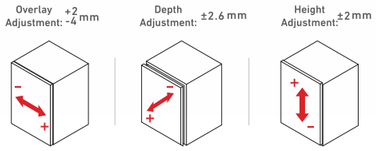

PRODUCT ACCESSORIES



Hinge cup decorative cover



Hinge arm decorative cover



Mounting plate for slide on hinge
H11H0

TYPES OF SCREWS AVAILABLE



D08 dowel
Dowel No. **D**



D10 dowel
Dowel No. **G**



F08 dowel
Dowel No. **N**




P10 dowel
Screw No. **P**

H11
SLIDE ON HINGE

- Opening degree: 110°
- Diameter of hinge cup: Φ35mm
- Height of hinge cup: 11.4mm
- Cup hole distance: 45mm/48mm/52mm
- Dimension of door: 3~7mm
- Range for door thickness: 14~22mm

A FULL OVERLAY	
	NON-SOFT CLOSE HINGE
Item No.	H11HAN






H=15+K-D

D \ K / H	3	4	5	6	7
0	18	19	20	21	22
2	16	17	18	19	20
4	14	15	16	17	18

B HALF OVERLAY	
	NON-SOFT CLOSE HINGE
Item No.	H11HBN






H=5+K-D

D \ K / H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

C INSET DOOR	
	NON-SOFT CLOSE HINGE
Item No.	H11HCN






H=A+K-1

A \ K / H	3	4	5	6	7
0	-2	-3	-4	-5	-6
2	0	-1	-2	-3	-4
4	2	1	0	-1	-2

OPENING CLEARANCE VALUE


A \ T / K	14	15	16	17	18	19	20	21	22
3	0.3	0.4	0.6	0.9	1.2	1.5	1.9	2.4	3.1
4	0.3	0.4	0.6	0.9	1.1	1.5	1.8	2.3	2.8
5	0.3	0.4	0.6	0.8	1.0	1.4	1.7	2.1	2.6
6	0.3	0.4	0.6	0.8	1.0	1.3	1.7	2.0	2.5
7	0.3	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.4

H = Height of mounting plate
D = Required cover distance on side panel
K = Distance from edge of door to the edge of the cup





L \ T / K	14	15	16	17	18	19	20	21	22
3	0	0	0	0	0	0	0	0	0.3
4	0	0	0	0	0.2	0.5	0.7	1.0	1.3
5	0.2	0.5	0.7	1.0	1.2	1.5	1.7	2.0	2.3
6	1.2	1.5	1.7	2.0	2.2	2.5	2.7	3.0	3.3
7	2.2	2.5	2.7	3.0	3.2	3.5	3.7	4.0	4.3


T = Door thickness
L = Gap between door and side panel
A = Distance from inside edge of door to the outside edge of side panel



CUP DRILLING









MOUNTING PLATE FOR CLIP ON SOFT CLOSING HINGE

H105/H72/H73/H107/H96/H49/H56

Item.No. H46H0









Item.No. H46H0E









Item.No. H46H0K








Item.No. H46H0S









Item.No. H60H0C










Item.No. H46H0F









Item.No. H88H0








MOUNTING PLATE FOR CLIP ON NON-SOFT CLOSING HINGE

H17D

Item.No. H12H0









Item.No. H12H0E









Item.No. H12H0K









Item.No. H12H0D10








Item.No. H12H0S










Item.No. H12H0C







Item.No. H12H0F




MOUNTING PLATE
FOR SLIDE ON HINGE
H11/H15/H18

Item.No. H11H0




Height(mm)	Heightt(mm)
0	8.5
2	11.5
4	13.5
6	16.5



Item.No. H11H0E




Heightt(mm)	Heightt(mm)
0	8.5
2	11.5
4	13.5
6	16.5



Item.No. H11H0K




Heightt(mm)	Heightt(mm)
0	8.5
2	11.5
4	13.5
6	16.5



Item.No. H11H0S




Heightt(mm)	Heightt(mm)
0	8.5
2	11.5
4	13.5



Item.No. H11H0F



Heightt(mm)	Heightt(mm)
2	11.5



STRAIGHT PLATE
FOR CLIP ON SOFT CLOSING HINGE
H105P/H105S/H105Q/H105PD/H105PE/H105PF/H105PT/H56S

Item.No. D88H1BC
(H=1)



D08 dowel
Dowel No. D



F08 dowel
Dowel No. N



Euro screw
Screw No. A



Item.No. D88H2BC
(H=2)



D08 dowel
Dowel No. D



F08 dowel
Dowel No. N




Euro screw
Screw No. A



Item.No. D88H4BC
(H=4)



D08 dowel
Dowel No. D




F08 dowel
Dowel No. N



Euro screw
Screw No. A



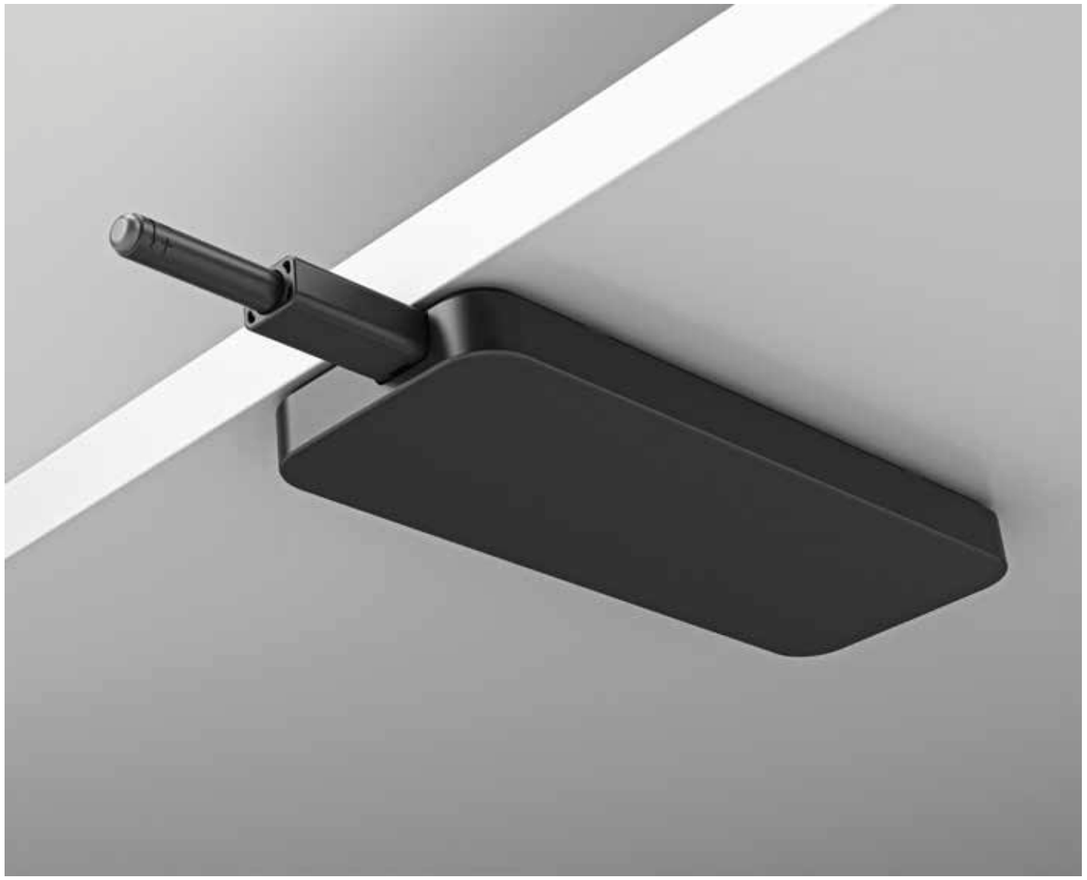


H3003
SMART PUSH



- Stoke: 56mm
- Material: POM
- Color: Drak grey / Light grey


H94GNA FULL OVERLAY



H=15+K-D

D \ K / H	3	4	5	6	7	8
0	17	18	19	20	21	22
2	15	16	17	18	19	20
4	13	14	15	16	17	18


H94GNB HALF OVERLAY



H=5+K-D

D \ K / H	3	4	5	6	7	8
0	8	9	10	11	12	13
2	6	7	8	9	10	11
4	4	5	6	7	8	9


H94GNC INSET DOOR



H=K-A-5.5

A \ K / H	3	4	5	6	7	8
0	2	-1	-2	-3	-4	-3.5
2	2	1	0	-1	-2	-1.5
4	4	3	2	1	0	0.5


H94QNA FULL OVERLAY



H=W-D-2

D \ W / H	19	20	21	22	23	24
0	17	18	19	20	21	22
2	15	16	17	18	19	20
4	13	14	15	16	17	18


H94QNB HALF OVERLAY



H=W-D-11

D \ W / H	19	20	21	22	23	24
0	7	8	9	10	11	13
2	5	6	7	8	9	11
4	3	4	5	6	7	9


H94QNC INSET DOOR




H=W+A-20

A \ W / H	19	20	21	22	23	24
0	1	0	-1	-2	-3	-4
2	3	2	1	0	-1	-2
4	5	4	3	2	1	0

INSTALLACTION INFORMATION

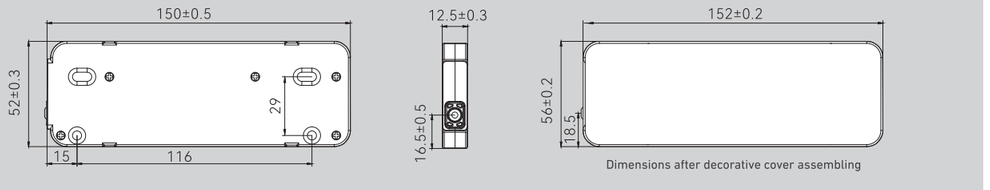

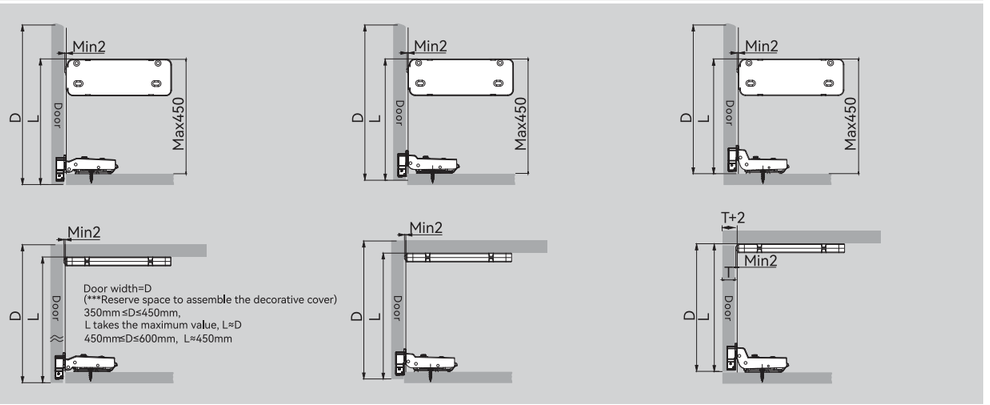

DIMENSIONS AND INSTALLATION INSTRUCTIONS

ITEM NO.	Soft close rebound buffers	H94GN Specialized hinges (A/B/C cranks as per order requirement) / H94QN Specialized hinges	ST*25 Cross countersunk self-tapping screws	ST4*16 Cross countersunk self-tapping screws	Arm cover
H3003A2Q00-2A/B/C	H3003L-2 Soft close rebound buffer with decorative cover (light type)	2	4	12	2
H3003A2T00-4A/B/C	H3003M-4 Soft close rebound buffer with decorative cover (standard type)	4	4	24	4
H3003A2Z00-5A/B/C	H3003H-5 Soft close rebound buffer with decorative cover (heavy type)	5	4	30	5
H3003A2Z00-6A/B/C	H3003H-6 Soft close rebound buffer with decorative cover (heavy type)	6	4	36	6





H3006
REBOUND BUFFER

- Stoke: 38mm
- Material: POM
- Magnetic force: 4300 Grauss
- Rebound force: 28N~31N




INSTALLATION PARAMETERS

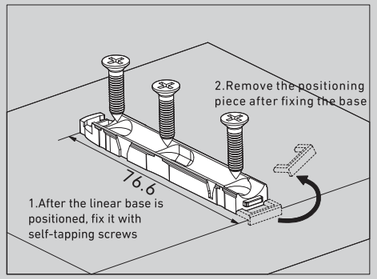


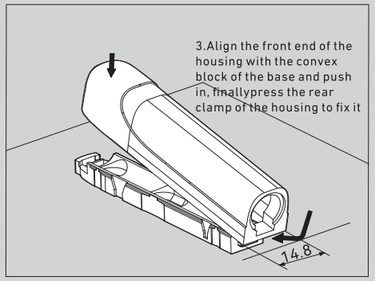

External Installation Type with Rubber

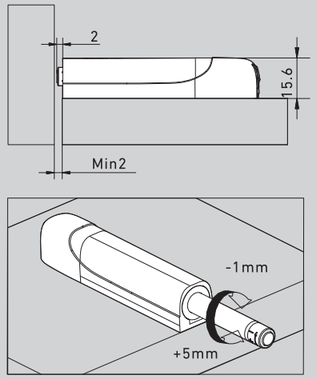


External Installation Type with Magnet

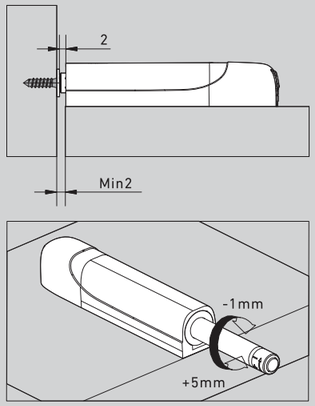

DIMENSIONS AND INSTALLATION INSTRUCTIONS

ITEM NO.	QTY	QTY	ITEM NO.	QTY	QTY
H3006A2Z00 (Concealed type)	50 Sets	200 Sets	H3006B2Z00 (External type)	50 Sets	200 Sets



DOUBLE WALL DRAWER SERIES





S50

Dream Box (With LED Glass-Boxside)

Glass side panel | Clip-on installation | Loading capacity 35kg | 3D + Tilt adjustment | Soft closing




S50BL800
DREAM BOX(LOW DRAWER WITH GLASS-BOXSIDE)



- Load capacity: 35Kg
- Length: 250-600mm
- Height of drawer sides: 94mm
- Front Panel width adjustment: +-1.2
- Front Panel height adjustment: +-2
- Front Panel tilt adjustment: -1.5,+4
- Drawer depth adjustment: 0-5

INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth




16mm panel


Front panel




Base panel



Rear panel




Base paneland drilling




Standard drawer





16mm panel

Hole position(mm)

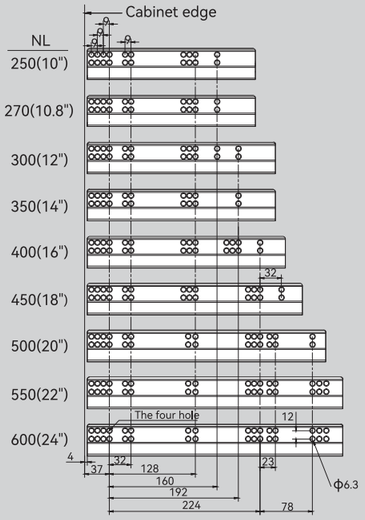


ORDER NUMBER INFORMATION

ITEM NO.			
S50BL600D/M-250	S50BL604D/M-250	S50BL606D/M-250	S50BL607D/M-250
S50BL600D/M-270	S50BL604D/M-270	S50BL606D/M-270	S50BL607D/M-270
S50BL600D/M-300	S50BL604D/M-300	S50BL606D/M-300	S50BL607D/M-300
S50BL600D/M-350	S50BL604D/M-350	S50BL606D/M-350	S50BL607D/M-350
S50BL600D/M-400	S50BL604D/M-400	S50BL606D/M-400	S50BL607D/M-400
S50BL600D/M-450	S50BL604D/M-450	S50BL606D/M-450	S50BL607D/M-450
S50BL600D/M-500	S50BL604D/M-500	S50BL606D/M-500	S50BL607D/M-500
S50BL600D/M-550	S50BL604D/M-550	S50BL606D/M-550	S50BL607D/M-550
S50BL600D/M-600	S50BL604D/M-600	S50BL606D/M-600	S50BL607D/M-600
Option S32H650 soft close undermounted sides	Option S32F651 push open undermounted sides	Option S32F653 Push open with stabilizer bar undermounted sides	Option S39P650 Push open & soft close undermounted sides


Side panel color (D for grey), (M for white)

DRAWER SLIDES L/R	ITEM NO.	FUNCTION
	S32H650	Soft close
	S32F651	Push open
	S32F653	Push open with stabilizer bar
	S39P650	Push open & soft close

SIDE PANELS L/R + GLASS DECORATIVE COVERS L/R	ITEM NO.
	S50BL600D/M-250CB
	S50BL600D/M-270CB
	S50BL600D/M-300CB
	S50BL600D/M-350CB
	S50BL600D/M-400CB
	S50BL600D/M-450CB
	S50BL600D/M-500CB
	S50BL600D/M-550CB
	S50BL600D/M-600CB

Side panel color (D for grey), (M for white)

Accessories






S50BM800
DREAM BOX (MEDIUM DRAWER WITH GLASS-BOXSIDE)



- Load capacity: 35Kg
- Length: 250-600mm
- Height of drawer sides: 132mm
- Front Panel width adjustment: +-1.2
- Front Panel height adjustment: +-2
- Front Panel tilt adjustment: -1.5,+4
- Drawer depth adjustment: 0-5


INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth



16mm panel


Standard drawer




16mm panel

Hole position(mm)


Front panel




Base panel




Rear panel



Base paneland drilling



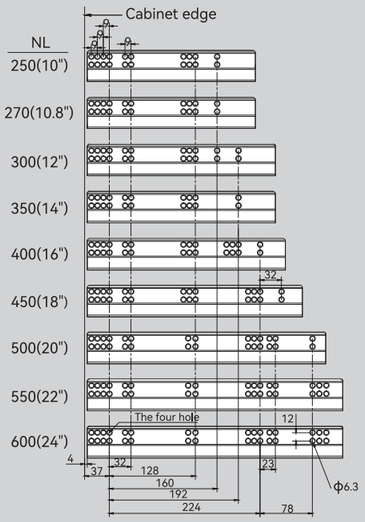


ORDER NUMBER INFORMATION

ITEM NO.			
S50BM600D/M-250	S50BM604D/M-250	S50BM606D/M-250	S50BM607D/M-250
S50BM600D/M-270	S50BM604D/M-270	S50BM606D/M-270	S50BM607D/M-270
S50BM600D/M-300	S50BM604D/M-300	S50BM606D/M-300	S50BM607D/M-300
S50BM600D/M-350	S50BM604D/M-350	S50BM606D/M-350	S50BM607D/M-350
S50BM600D/M-400	S50BM604D/M-400	S50BM606D/M-400	S50BM607D/M-400
S50BM600D/M-450	S50BM604D/M-450	S50BM606D/M-450	S50BM607D/M-450
S50BM600D/M-500	S50BM604D/M-500	S50BM606D/M-500	S50BM607D/M-500
S50BM600D/M-550	S50BM604D/M-550	S50BM606D/M-550	S50BM607D/M-550
S50BM600D/M-600	S50BM604D/M-600	S50BM606D/M-600	S50BM607D/M-600
Option S32H650 soft close undermounted sides	Option S32F651 push open undermounted sides	Option S32F653 Push open with stabilizer bar undermounted sides	Option S39P650 Push open & soft close undermounted sides


Side panel color (D for grey), (M for white)

DRAWER SLIDES L/R	ITEM NO.	FUNCTION
	S32H650	Soft close
	S32F651	Push open
	S32F653	Push open with stabilizer bar
	S39P650	Push open & soft close

SIDE PANELS L/R + GLASS DECORATIVE COVERS L/R	ITEM NO.
	S50BM600D/M-250CB
	S50BM600D/M-270CB
	S50BM600D/M-300CB
	S50BM600D/M-350CB
	S50BM600D/M-400CB
	S50BM600D/M-450CB
	S50BM600D/M-500CB
	S50BM600D/M-550CB
	S50BM600D/M-600CB

Side panel color (D for grey), (M for white)

Accessories






S50BH800
DREAM BOX (HIGH DRAWER WITH GLASS-BOXSIDE)



- Load capacity: 35Kg
- Length: 250-600mm
- Height of drawer sides: 179mm
- Front Panel width adjustment: +-1.2
- Front Panel height adjustment: +-2
- Front Panel tilt adjustment: -1.5,+4
- Drawer depth adjustment: 0-5

INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth



16mm panel


Standard drawer






16mm panel


Front panel




Base panel




Rear panel



Base paneland drilling



Hole position(mm)

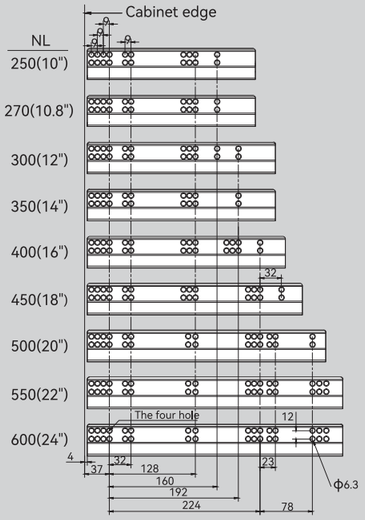


ORDER NUMBER INFORMATION

ITEM NO.			
S50BH600D/M-250	S50BH604D/M-250	S50BH606D/M-250	S50BH607D/M-250
S50BH600D/M-270	S50BH604D/M-270	S50BH606D/M-270	S50BH607D/M-270
S50BH600D/M-300	S50BH604D/M-300	S50BH606D/M-300	S50BH607D/M-300
S50BH600D/M-350	S50BH604D/M-350	S50BH606D/M-350	S50BH607D/M-350
S50BH600D/M-400	S50BH604D/M-400	S50BH606D/M-400	S50BH607D/M-400
S50BH600D/M-450	S50BH604D/M-450	S50BH606D/M-450	S50BH607D/M-450
S50BH600D/M-500	S50BH604D/M-500	S50BH606D/M-500	S50BH607D/M-500
S50BH600D/M-550	S50BH604D/M-550	S50BH606D/M-550	S50BH607D/M-550
S50BH600D/M-600	S50BH604D/M-600	S50BH606D/M-600	S50BH607D/M-600
Option S32H650 soft close undermounted sides	Option S32F651 push open undermounted sides	Option S32F653 Push open with stabilizer bar undermounted sides	Option S39P650 Push open & soft close undermounted sides


Side panel color (D for grey), (M for white)

DRAWER SLIDES L/R	ITEM NO.	FUNCTION
	S32H650	Soft close
	S32F651	Push open
	S32F653	Push open with stabilizer bar
	S39P650	Push open & soft close

SIDE PANELS L/R + GLASS DECORATIVE COVERS L/R	ITEM NO.
	S50BH600D/M-250CB
	S50BH600D/M-270CB
	S50BH600D/M-300CB
	S50BH600D/M-350CB
	S50BH600D/M-400CB
	S50BH600D/M-450CB
	S50BH600D/M-500CB
	S50BH600D/M-550CB
	S50BH600D/M-600CB

Side panel color (D for grey), (M for white)


Accessories




S50B DOUBLE WALL DRAWER (GLASS BOXSIDE)

S50B LOW DRAWER HEIGHT L


Internal cabinet space




Front connectors installation size



Front panel drilling size




Rear panel installation size




S50B MEDIUM DRAWER HEIGHT M


Internal cabinet space




Front connectors installation size



Front panel drilling size




Rear panel installation size




S50B HIGH DRAWER HEIGHT H


Internal cabinet space




Front connectors installation size



Front panel drilling size




Rear panel installation size





S50B DOUBLE WALL DRAWER (GLASS BOXSIDE) INSTALLATION

DRAWER INSTALLATION DEMONSTRATION




Base panel installation






Front panel connectors installation




Front panel installation




Slide the drawer into the cabinet


S50B DRAWER ADJUSTMENT DEMONSTRATION




Front panel height adjustment ±2mm




Front panel width adjustment ±1.2mm



Front panel tilt adjustment-1.5+4




Drawer depth adjustment0-5




Decorative covers installation


S50B DRAWER DISASSEMBLY DEMONSTRATION




Decorative covers disassembly




Front panel disassembly





Drawer disassembly



Decorative covers installation




S90
SLIM DOUBLE WALL DRAWER (LOW DRAWER)



- Load capacity: 35Kg
- Length: 270-550mm
- Height of side panels: 75mm
- Front Panel width adjustment: ±1
- Front Panel height adjustment: ±2


INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth




16mm panel


Front panel




Base panel



Rear panel




Base paneland drilling




Standard drawer






16mm panel

Hole position(mm)

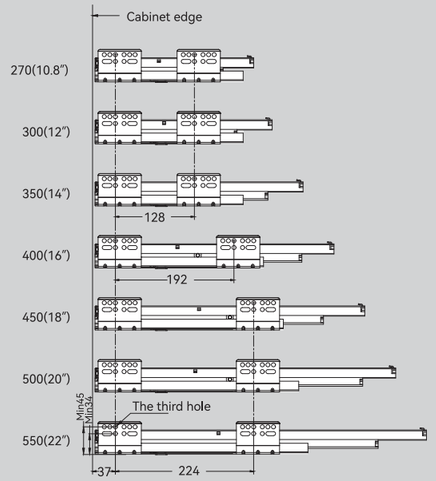



Drawer slides L/R



Sides panels L/R +
Decorative covers L/R




Front connectors L/R




Backplane fastener L/R

Accessories



ORDER NUMBER INFORMATION

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PLANE FASTENER L/R
S90AL600G/W-270				
S90AL600G/W-300				
S90AL600G/W-350				
S90AL600G/W-400				
S90AL600G/W-450				
S90AL600G/W-500				
S90AL600G/W-550				

Side panel color (W for White), (G for Grey)




S90
SLIM DOUBLE WALL DRAWER (MEDIUM DRAWER)



- Load capacity: 35Kg
- Length: 270-550mm
- Height of side panels: 90mm
- Front Panel width adjustment: ±1
- Front Panel height adjustment: ±2


INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth




16mm panel

Front panel




Base panel



Rear panel




Base paneland drilling




Standard drawer






16mm panel

Hole position(mm)

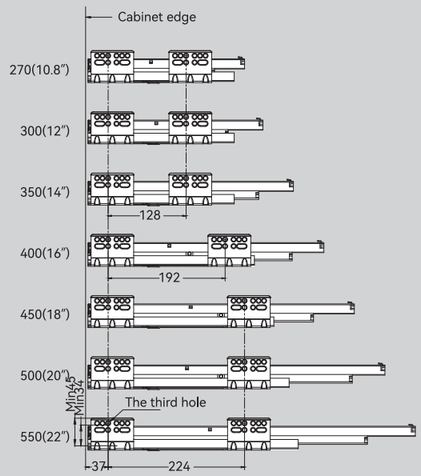



Drawer slides L/R



Sides panels L/R +
Decorative covers L/R




Front connectors L/R




Backplane fastener L/R

Accessories



ORDER NUMBER INFORMATION

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PLANE FASTENER L/R
S90AM600G/W-270				
S90AM600G/W-300				
S90AM600G/W-350				
S90AM600G/W-400				
S90AM600G/W-450				
S90AM600G/W-500				
S90AM600G/W-550				

Side panel color (W for White), (G for Grey)




S90
SLIM DOUBLE WALL DRAWER (HIGH DRAWER)



- Load capacity: 35Kg
- Length: 270-550mm
- Height of side panels: 122mm
- Front Panel width adjustment: ±1
- Front Panel height adjustment: ±2


INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth




16mm panel

Front panel




Base panel



Rear panel




Base paneland drilling




Standard drawer






16mm panel

Hole position(mm)

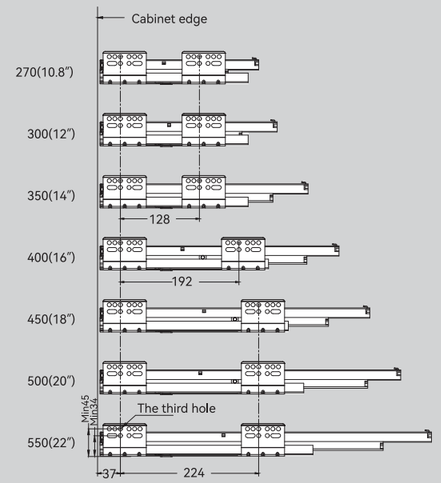



Drawer slides L/R



Sides panels L/R +
Decorative covers L/R




Front connectors L/R





Backplane fastener L/R

Accessories



ORDER NUMBER INFORMATION

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PLANE FASTENER L/R
S90AH600G/W-270				
S90AH600G/W-300				
S90AH600G/W-350				
S90AH600G/W-400				
S90AH600G/W-450				
S90AH600G/W-500				
S90AH600G/W-550				

Side panel color (W for White), (G for Grey)




S90
SLIM DOUBLE WALL DRAWER (X-HIGH DRAWER)



- Load capacity: 35Kg
- Length: 270-550mm
- Height of side panels: 172mm
- Front Panel width adjustment: ±1
- Front Panel height adjustment: ±2

INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

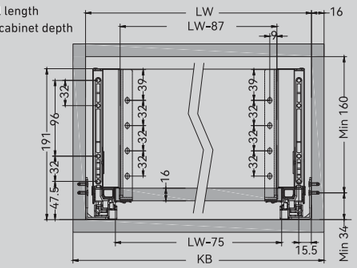

16mm panel


Standard drawer






16mm panel


Front panel




Base panel




Rear panel



Base paneland drilling




Hole position(mm)

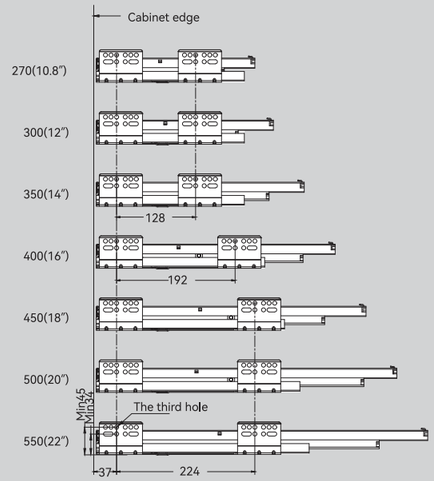



Drawer slides L/R



Sides panels L/R +
Decorative covers L/R




Front connectors L/R




Backplane fastener L/R

Accessories




ORDER NUMBER INFORMATION

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PLANE FASTENER L/R
S90AK600G/W-270				
S90AK600G/W-300				
S90AK600G/W-350				
S90AK600G/W-400				
S90AK600G/W-450				
S90AK600G/W-500				
S90AK600G/W-550				

Side panel color (W for White), (G for Grey)




S90
SLIM DOUBLE WALL DRAWER (XX-HIGH DRAWER)

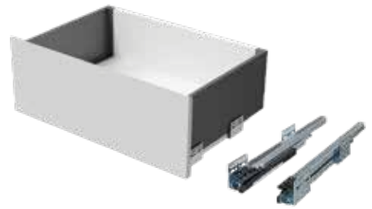


- Load capacity: 35Kg
- Length: 270-550mm
- Height of side panels: 203mm
- Front Panel width adjustment: ±1
- Front Panel height adjustment: ±2


INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth




16mm panel








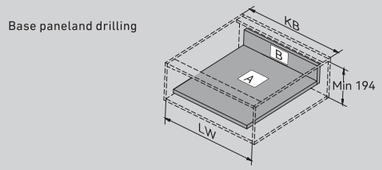


Standard drawer






16mm panel

Hole position(mm)

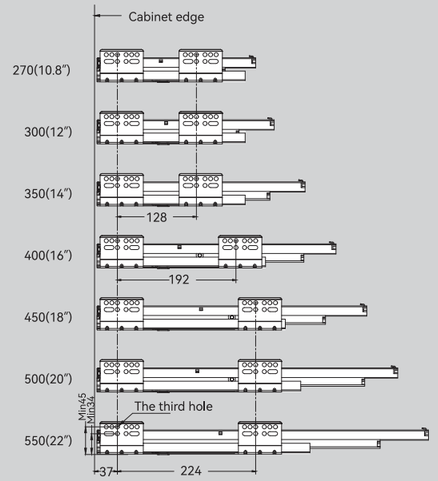



Drawer slides L/R



Sides panels L/R +
Decorative covers L/R




Front connectors L/R




Backplane fastener L/R

Accessories







ORDER NUMBER INFORMATION

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PLANE FASTENER L/R
S90AQ600G/W-270				
S90AQ600G/W-300				
S90AQ600G/W-350				
S90AQ600G/W-400				
S90AQ600G/W-450				
S90AQ600G/W-500				
S90AQ600G/W-550				





Side panel color (W for White), (G for Grey)

S90 SLIM DOUBLE WALL DRAWER INSTALLTION STRUCTION





S90A LOW DRAWER HEIGHT = 75

Internal cabinet space	Front connectors installation size	Front panel drilling size	Rear panel installation size
			





S90A MEDIUM DRAWER HEIGHT = 90

Internal cabinet space	Front connectors installation size	Front panel drilling size	Rear panel installation size
			





S90A HIGH DRAWER HEIGHT = 122

Internal cabinet space	Front connectors installation size	Front panel drilling size	Rear panel installation size
			

S90A X-HIGH DRAWER HEIGHT = 172


Internal cabinet space	Front connectors installation size	Front panel drilling size	Rear panel installation size
			

S90A XX-HIGH DRAWER HEIGHT = 203


Internal cabinet space	Front connectors installation size	Front panel drilling size	Rear panel installation size
			

S90 SLIM DOUBLE WALL SIDE PANEL INSTALLATION


S90A LOW DRAWER INSTALLATON

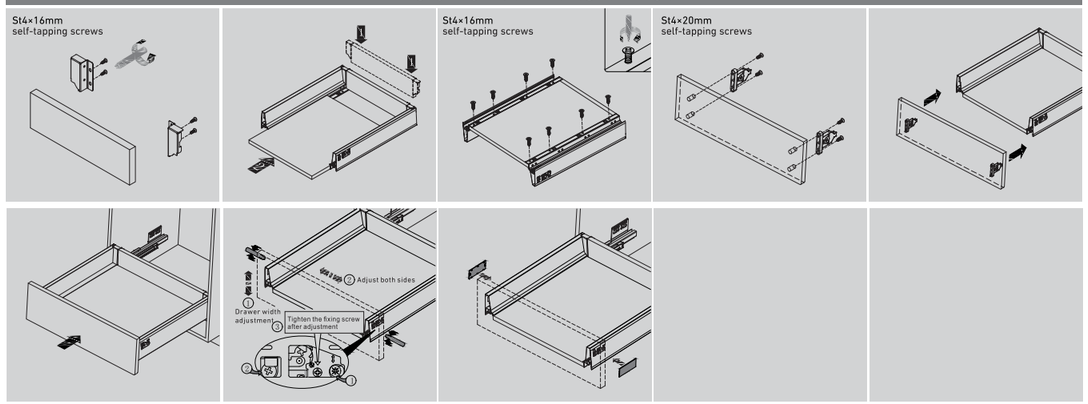


S90A HIGHER / X-HIGHER DRAWER INSTALLATON

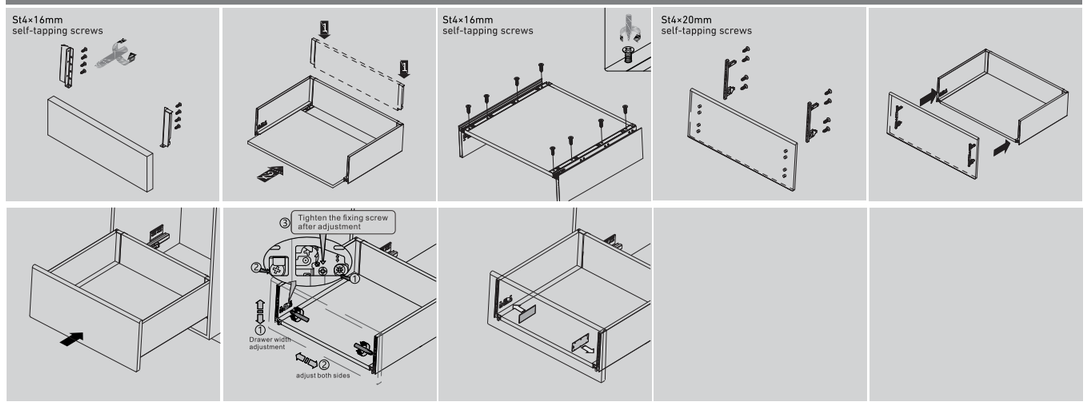

S90A LOW / MEDIUM / HIGH DRAWER DISASSEMBLE

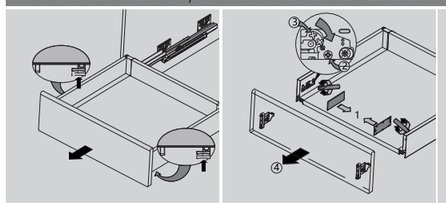


S90AHIGHER / X-HIGH DRAWER DISASSEMBLE

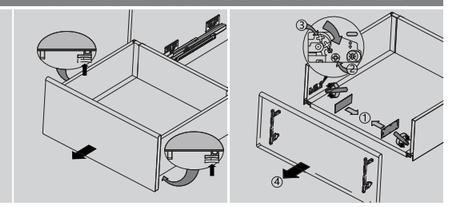



DRAWER SLIDE

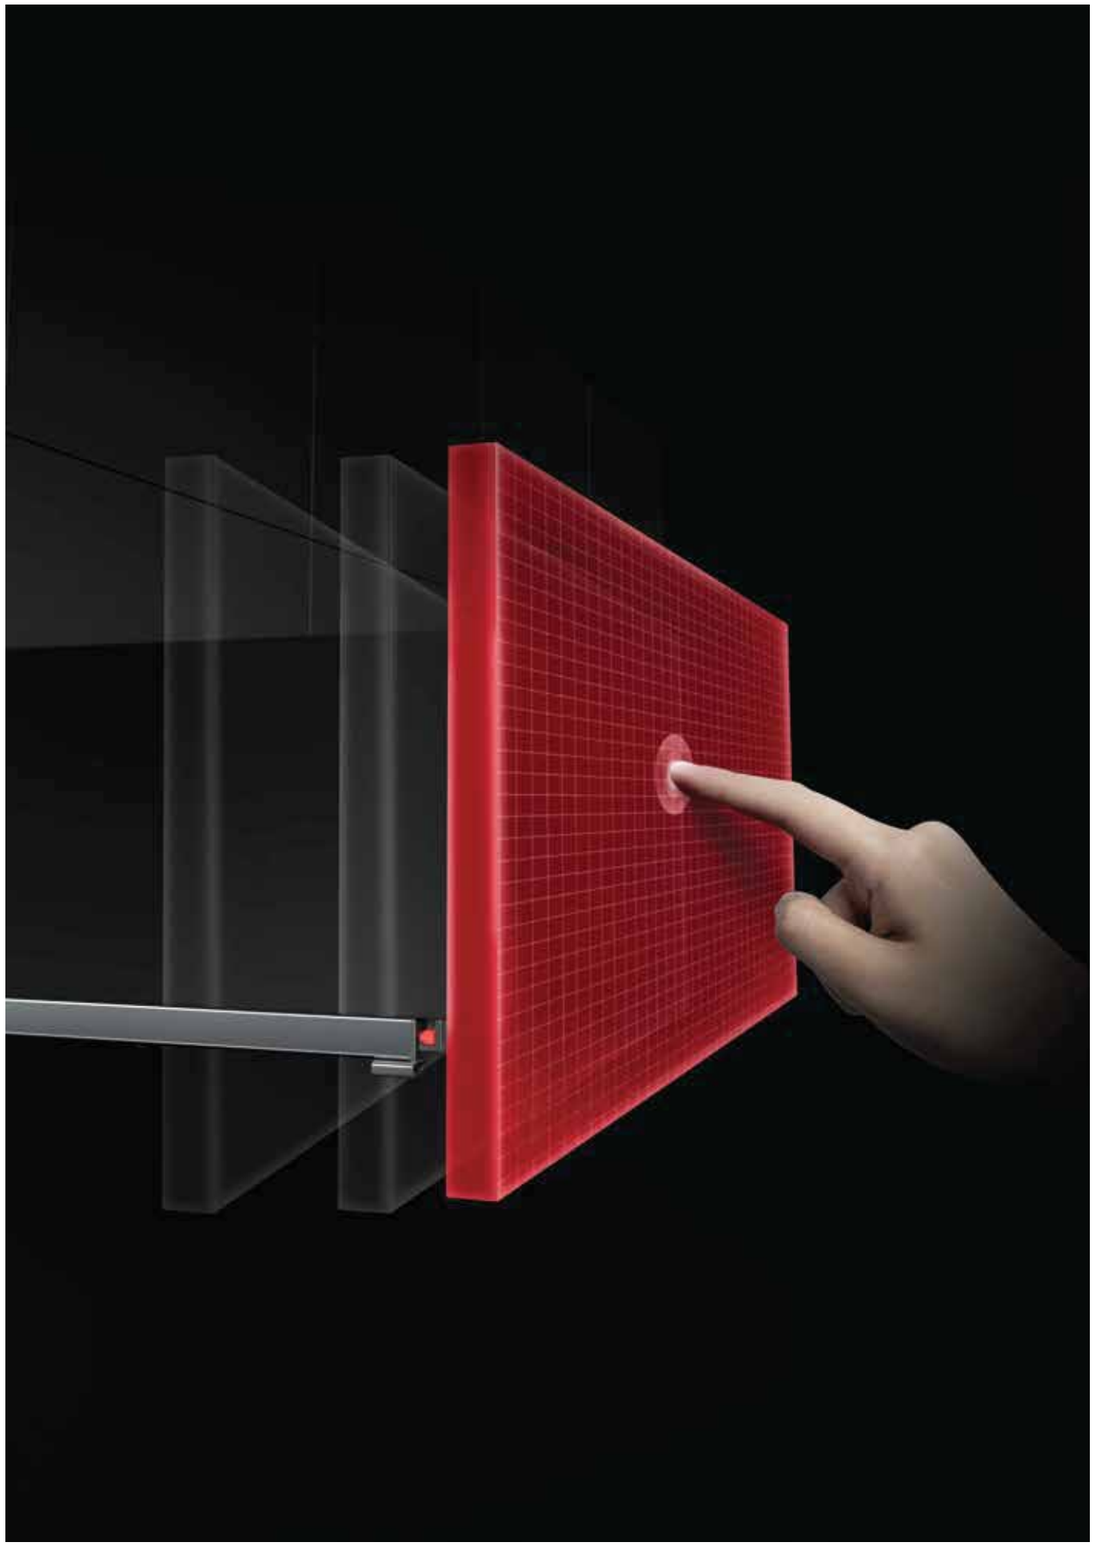





S39

One Touch Open & Smooth Soft Closing

Saving 50% pushing force

2.5mm Opening gap

With stabilizer bar, Providing a wide push to open range on the drawer front panel

Automatic resetting Function for soft closing

Quiet and smooth function for soft closing




S32
FULL EXTENSION SYNCHRONIZED SOFT CLOSING UNDERMOUNTED SLIDES



- Load capacity: 35Kg
- Length: 250-600mm
- Drawer width adjustment: ±1.5mm
- Drawer height adjustment: 0~+3mm
- Drawer depth adjustment: 0~+5mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm




16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:19mm




18mm panel

Standard drawer




Internal drawer




16/18mm panel

Drawer size and drilling(mm)

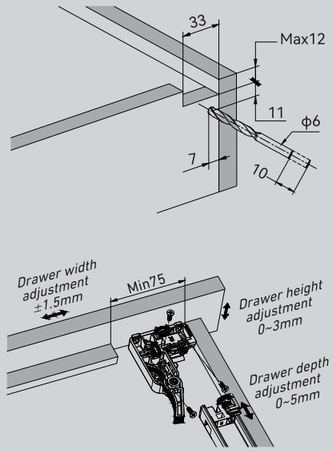

Hole position(mm)

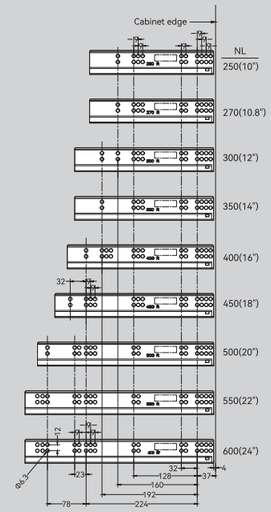

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16MM)	ITEM NO.(FOR 18MM)	SPECIFICATION
S32H600-250	S32H800-250	250mm(10")
S32H600-270	S32H800-270	270mm(10.7")
S32H600-300	S32H800-300	300mm(12")
S32H600-350	S32H800-350	350mm(14")
S32H600-400	S32H800-400	400mm(16")
S32H600-450	S32H800-450	450mm(18")
S32H600-500	S32H800-500	500mm(20")
S32H600-550	S32H800-550	550mm(22")
S32H600-600	S32H800-600	600mm(24")




S32F
SYNCHRONIZED FULL EXTENSION PUSH TO OPEN UNDERMOUNTED SLIDES



- Load capacity: 35Kg
- Length: 250-550mm
- Drawer width adjustment: ±1.5mm
- Drawer height adjustment: 0~+3mm
- Front panel gap adjustment: ±2mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm




16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:19mm




18mm panel

Standard drawer




Internal drawer




16/18mm panel

Drawer size and drilling(mm)

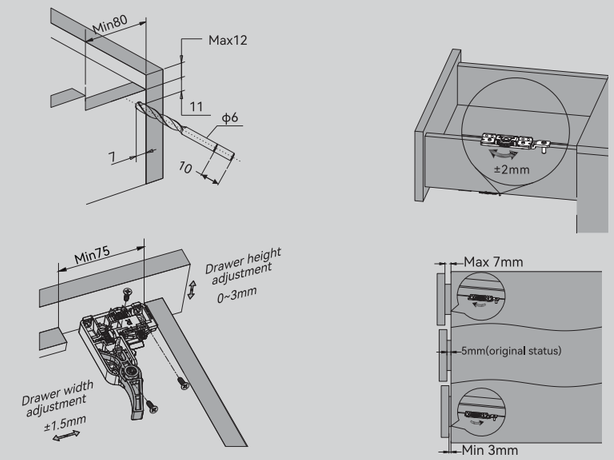

Hole position(mm)

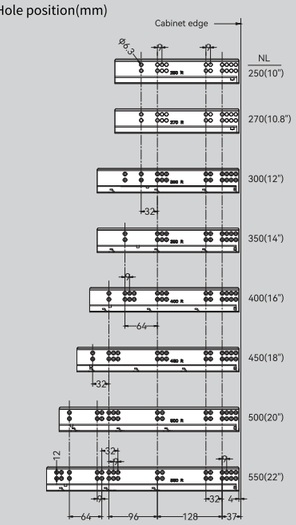

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16MM)	ITEM NO.(FOR 18MM)	SPECIFICATION
S32F601-250	S32F801-250	250mm(10")
S32F601-270	S32F801-270	270mm(10.7")
S32F601-300	S32F801-300	300mm(12")
S32F601-350	S32F801-350	350mm(14")
S32F601-400	S32F801-400	400mm(16")
S32F601-450	S32F801-450	450mm(18")
S32F601-500	S32F801-500	500mm(20")
S32F601-550	S32F801-550	550mm(22")




S21
PARTIAL EXTENSION SOFT CLOSE UNDERMOUNTED SLIDES



- Load capacity: 25Kg
- Length: 250-550mm
- Drawer height adjustment:0~+3mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling




16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling




18mm panel

Standard drawer




Internal drawer





16/18mm panel

Drawer size and drilling(mm)


NL(mm)	250	300	350	400	450	500	550
X2(mm)	188	213	238	273	298	323	358
X3(mm)	220	245	270	305	330	355	390







Hole position(mm)

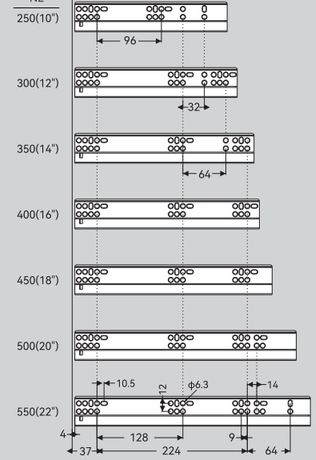

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16MM)	ITEM NO.(FOR 18MM)	SPECIFICATION
S21H600-250	S21H800-250	250mm(10")
S21H600-300	S21H800-300	300mm(12")
S21H600-350	S21H800-350	350mm(14")
S21H600-400	S21H800-400	400mm(16")
S21H600-450	S21H800-450	450mm(18")
S21H600-500	S21H800-500	500mm(20")
S21H600-550	S21H800-550	550mm(22")




S21F
PARTIAL EXTENSION PUSH OPEN UNDERMOUNTED SLIDES



- Load capacity: 25Kg
- Length: 250-550mm
- Drawer height adjustment:0~+3mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling




16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling




18mm panel

Standard drawer




Internal drawer





16/18mm panel

Drawer size and drilling(mm)


NL(mm)	250	300	350	400	450	500	550
X2(mm)	189	239	289	339	389	439	489
X3(mm)	221	271	321	371	421	471	521







Hole position(mm)

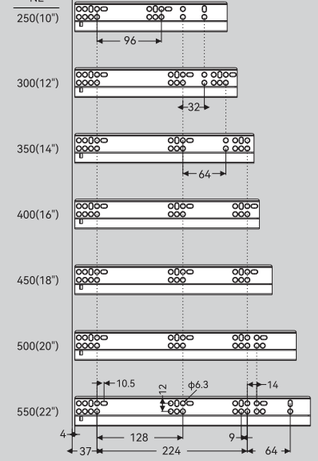


ORDER NUMBER INFORMATION

ITEM NO.(FOR 16MM)	ITEM NO.(FOR 18MM)	SPECIFICATION
S21F600-250	S21F800-250	250mm(10")
S21F600-300	S21F800-300	300mm(12")
S21F600-350	S21F800-350	350mm(14")
S21F600-400	S21F800-400	400mm(16")
S21F600-450	S21F800-450	450mm(18")
S21F600-500	S21F800-500	500mm(20")
S21F600-550	S21F800-550	550mm(22")



S4502A
FULL EXTENSION SOFT CLOSE BALL BEARING SLIDES

- Width: 45.7mm
- Thickness: 12.7mm
- Length: 250-600mm
- Loading capacity: 35kg 18"
- Finishing: black spray; zinc plated
- Material thickness: 1.2/1.2/1.5mm




ORDER NUMBER INFORMATION

ITEM NO.		SPECIFICATION	HOLE PATTERN						
			A	B	C	D	E	F	XC
S4502A0-250	S4502A1-250	250mm(10")	250	240		160			190
S4502A0-300	S4502A1-300	300mm(12")	300	290	64	224			255
S4502A0-350	S4502A1-350	350mm(14")	350	340	96	256	128		340
S4502A0-400	S4502A1-400	400mm(16")	400	400	128	320	192		400
S4502A0-450	S4502A1-450	450mm(18")	450	450	160	352	224		450
S4502A0-500	S4502A1-500	500mm(20")	500	450	192	416	256		500
S4502A0-550	S4502A1-550	550mm(22")	550	550	224	448	224	320	550
S4502A0-600	S4502A1-600	600mm(24")	600	600	224	512	224	352	600

A0 for zinc plating; A1 for black spray

S4502B
FULL EXTENSION SOFT CLOSE BALL BEARING SLIDES

- Width: 44.8mm
- Thickness: 12.7mm
- Length: 250-600mm
- Loading capacity: 25kg 18"
- Finishing: black spray; zinc plated
- Material thickness: 1.0/1.0/1.2mm




ORDER NUMBER INFORMATION

ITEM NO.		SPECIFICATION	HOLE PATTERN						
			A	B	C	D	E	F	XC
S4502B0-250	S4502B1-250	250mm(10")	250	240		160			190
S4502B0-300	S4502B1-300	300mm(12")	300	290	64	224			255
S4502B0-350	S4502B1-350	350mm(14")	350	340	96	256	128		340
S4502B0-400	S4502B1-400	400mm(16")	400	400	128	320	192		400
S4502B0-450	S4502B1-450	450mm(18")	450	450	160	352	224		450
S4502B0-500	S4502B1-500	500mm(20")	500	450	192	416	256		500
S4502B0-550	S4502B1-550	550mm(22")	550	550	224	448	224	320	550
S4502B0-600	S4502B1-600	600mm(24")	600	600	224	512	224	352	600

A0 for zinc plating; A1 for black spray


INSTALLATION PARAMETERS

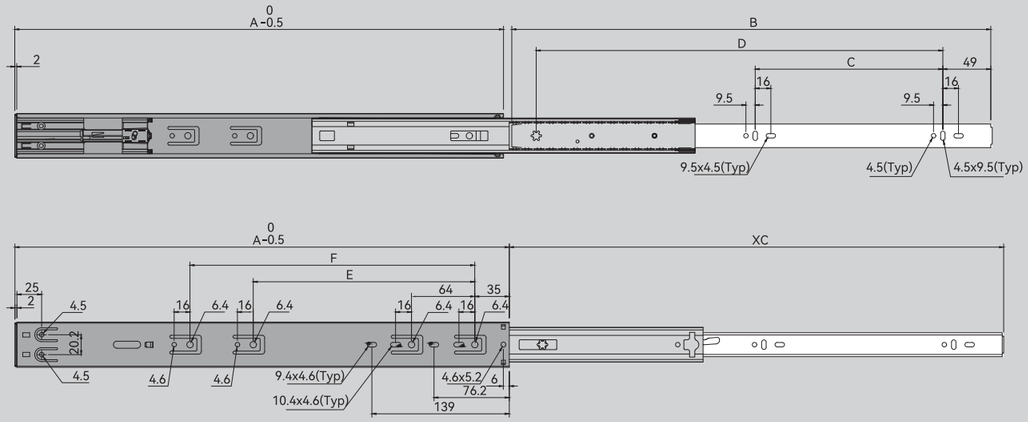



S4503
FULL EXTENSION PUSH OPEN BALL BEARING SLIDES

- Width: 45.7mm
- Thickness: 12.7mm
- Length: 250-600mm
- Loading capacity: 35kg 18"
- Finishing: black spray; zinc plated
- Material thickness: 1.2/1.2/1.5mm



ORDER NUMBER INFORMATION

ITEM NO.		SPECIFICATION	HOLE PATTERN					
			A	B	C	D	E	F
S4503A0-250	S4503A1-250	250mm(10")	250	235				
S4503A0-300	S4503A1-300	300mm(12")	300	285	64	128		
S4503A0-350	S4503A1-350	350mm(14")	350	335	96	128	128	
S4503A0-400	S4503A1-400	400mm(16")	400	385	128	160	192	
S4503A0-450	S4503A1-450	450mm(18")	450	435	160	160	224	
S4503A0-500	S4503A1-500	500mm(20")	500	485	192	192	256	
S4503A0-550	S4503A1-550	550mm(22")	550	535	224	192	224	320
S4503A0-600	S4503A1-600	600mm(24")	600	585	224	256	224	352

A0 for zinc plating; A1 for black spray

INSTALLATION PARAMETERS

